



NS11

SENTEST.com


Wide temperature range.
Providing professional IR sensors for different applications.





Infrared Thermometer

- Temperature range : 0°C ~ 500°C
- Optical resolution up to 20:1
- 6 digit backlit LCD display
- 150 ms response time
- 4 ~ 20mA output
- Digital communication
- Simultaneous analog and digital outputs
- Rugged IP 65 aluminum housing
- STonline Software

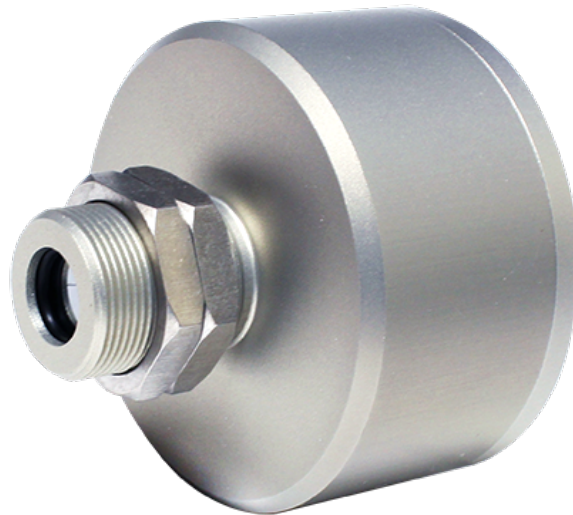

General

Environmental Rating	IP 65 (NEMA - 4)
Ambient Temperature	0°C to 70°C
Storage Temperature	-20°C to 80°C
Relative Humidity	10 to 95%, non-condensing
Cable Temperature	-20°C to 80°C
Weight	200g

Electrical


Analog Output	4 ~ 20mA
Digital Output	TTL
Maximum Loop Resistance (A)	500 Ω
Power Supply	24 VDC ± 20%
Current Draw	max. 100 mA
Display	6 digit backlit LCD display
Cable Length	3m options : 5m or 10m

Measurement


Temperature Range	0°C ~ 500°C (32°F to 932°F)
Spectral Response	8 ~ 14 μm
Optics Resolution (90% energy)	20:1
Accuracy*1	±1% of reading or ±1.5°C, whichever is greater
Repeatability*1	±0.5% of reading or ±1°C, whichever is greater
Temperature Resolution	0.1°C
Response Time (95% signal)	150 ms
Emissivity (adjustable)	0.100 ~ 1.000 (adjustable)
Signal processing	peak hold, valley hold, average
Software	STonline

*1 At 23°C ± 5°C, emissivity = 0.95

Dimensions(mm)




Optical Specifications

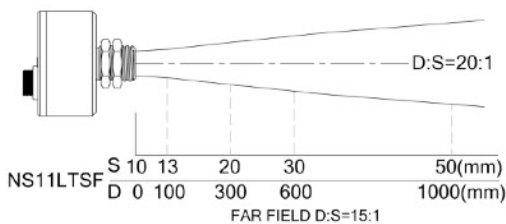


Optional Accessories

Fixed Bracket




Adjustable



Up Button

Displa

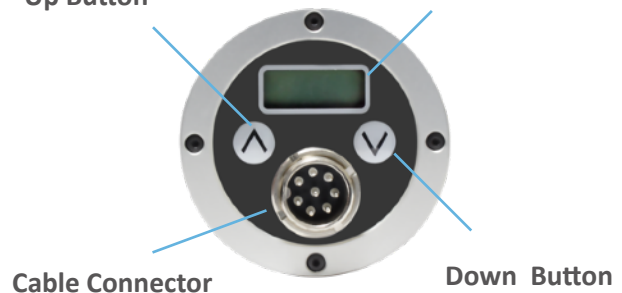

Specifications are subject to change without notice
NS11-E23-A



SENTEST Instruments Corporation Ltd.
1F., No. 43, Ln. 80, Guangfu N. Rd., Songshan Dist.,
Taipei City 105035, Taiwan
Tel : +886-2-2579-5079, Fax : +886-2-2579-5297
www.sentest.com